


SUPERHAWK II



Portable Thermal Fogger Petroleum-Based Pulse-Jet Powered

- Fast and easy starting every time
- Huge fog output
- Ultra-lightweight
- Compact size
- Limited 2-year warranty

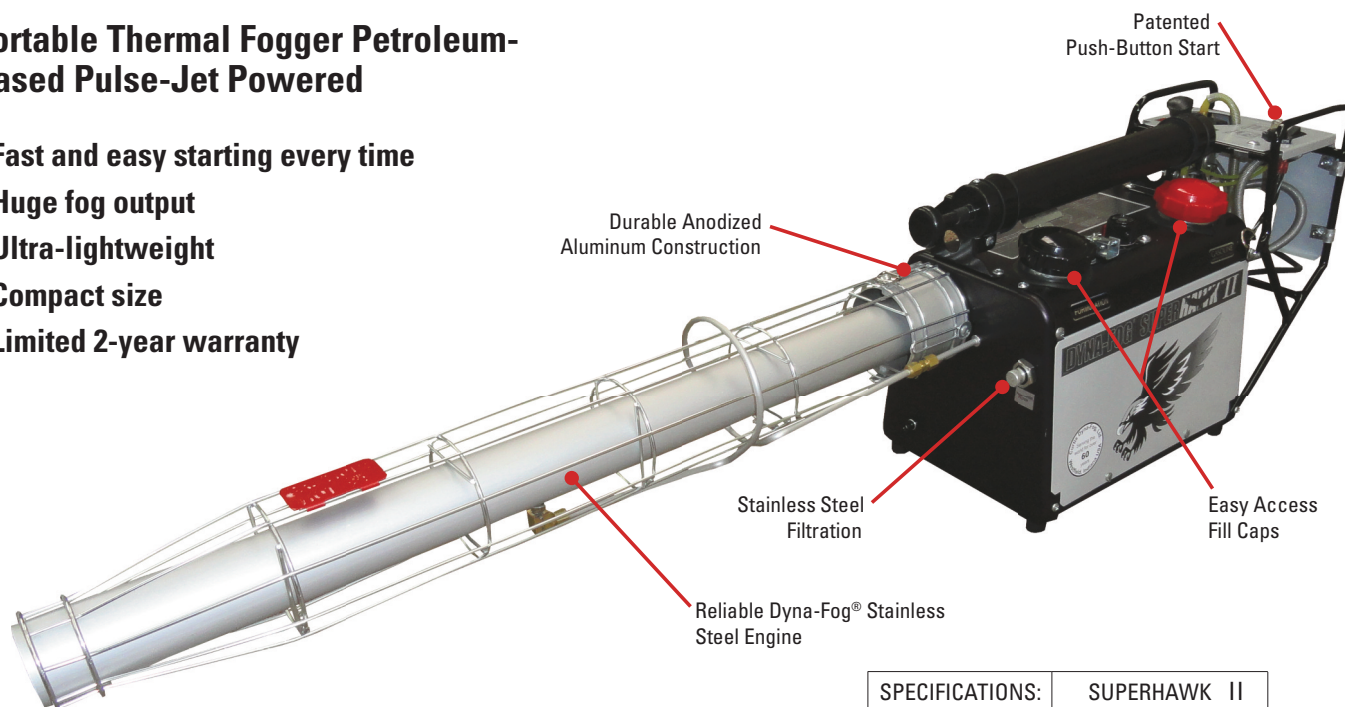

For Professional Use

Compact, ultra-light-weight and powerful, the Superhawk product line offers yet another option for Public Health officials and other industry professionals. Powered by the same reliable Dyna-Fog® stainless steel engine, the Superhawk remains the machine of choice by Health Ministry professionals, Mosquito Control Departments, Pest Control operators and others.

The Superhawk's ultra-light-weight design and ability to produce large volumes of dense fog make the Superhawk ideal for use in both local and remote areas. Built to rigid quality standards and backed by more than 65 years in the industry, the Superhawk continues to be an essential part of any program where performance, simplicity and reliability are required.

Part #	Description
58800-20	Superhawk orifice - export only
58800-1	Superhawk metering - export only

SPECIFICATIONS:	SUPERHAWK II
Performance Of Combustion Engine:	22 KW., 18,900 KCal/hr., 30 HP.
Solution Output:	0-42 L/hr. 0-11 U.S. Gal/hr. Produces 76,000 cubic feet (2200 cubic meters) of effective output per minute
Flow Control:	Metering Valve
Solution Tank Capacity:	4.5 liters (1.2 gallons)
Solution Tank Construction:	Aluminum
Solution Tank Pressure:	0.28 Bar. (4 PSI.)
Gasoline Tank Capacity:	1.1 liters (0.3 gallons)
Gasoline Tank Construction:	Aluminum
Gasoline Tank Pressure:	Vented, Non-Pressurized
Gasoline Consumption:	1.9 L/hr. (0.5 Gal/hr.)
Ignition Source:	"Buzzer" coil
Battery:	12 VDC; (8) 1.5V "D" Size. With Auxiliary Start (Cigarette Lighter Cable)
Fog Particle Size:	0.5 - 50 Microns (VMD.)
Weight (Empty):	7.5 kilograms (16.5 pounds)
Dimensions (cm):	132 X 24 X 36 (L X W X H)
Dimensions (inches):	52 X 9 X 14 (L X W X H)
Shipping Size (cm):	140 X 28 X 41 (L X W X H)
Shipping Size (inches):	55 X 11 X 16 (L X W X H)
Shipping Weight:	14.5 kilograms, 32 pounds
Shipping Volume:	.16 cubic meters, 5.6 cubic feet
Options:	Interchangeable Orifice
Sewer and leak detection attachment available	

SALES AND TECHNICAL SUPPORT
135 Region South Drive
Jackson GA 30233
678-688-5601
www.bgequip.com



Curtis Dyna-Fog a Division of B&G Equipment Company

MANUFACTURING FACILITY
525 Park Street
Westfield, IN 46074
www.dynafog.com